

TPP


SMALL HEAD SCREW

- The reduced head with a 60° angle ensures a concealed effect and easy insertion even in small thickness, without creating openings in the timber
- Ideal for use in joints to secure beads or small elements
- Made of carbon steel with bright zinc plating




MATERIAL: carbon steel with bright zinc plated

A maximum fastening thickness



d ₁ [mm]	d _k [mm]	CODE	L [mm]	b [mm]	A [mm]	pcs
3,5 TX 10	5,75	TPP3530	30	20	10	500
		TPP3540	40	26	14	500
		TPP3550	50	34	16	500
		TPP3560	60	40	20	500

GEOMETRY

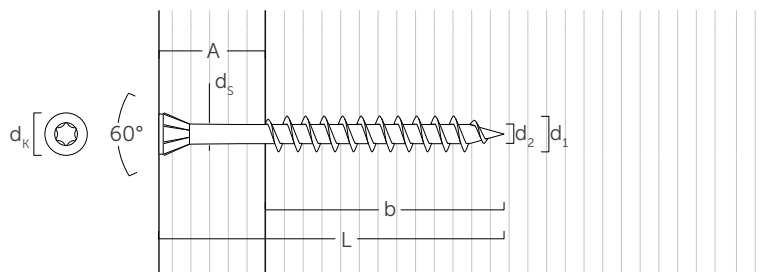

nominal diameter	d₁	[mm]	3,5
head diameter	d _k	[mm]	5,75
thread diameter	d ₂	[mm]	2,30
shank diameter	d _s	[mm]	2,65
head thickness	t ₁	[mm]	4,00
pre-drilling hole diameter ⁽¹⁾	d _v	[mm]	2,0

⁽¹⁾ Pre-drilling valid for softwood.