

WBAZ

STAINLESS STEEL WASHER WITH SEALING GASKET

WATERPROOF


Perfect watertight closure and excellent sealing thanks to the EPDM sealing gasket.

RESISTANT TO UV RAYS

Excellent resistance to UV rays. Ideal for outdoor use thanks to the adaptability of the EPDM gasket and washer in stainless steel A2 | AISI304.

VERSATILITY

Ideal for use on sheets (thickness: up to 0,7 mm) in combination with TBS EVO Ø6 screws, that can be installed without pre-drill, or with MTS A2 | AISI304 screws, installed with pre-drill.

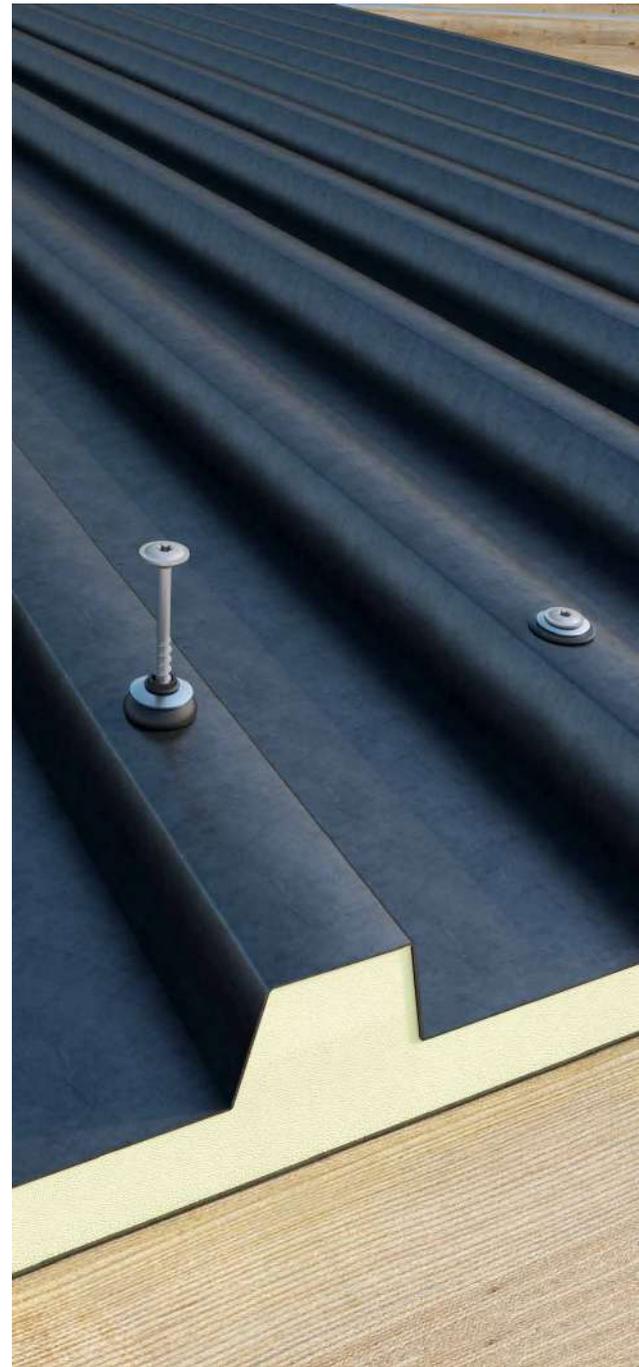

CHARACTERISTICS

FOCUS	water-tightness and UV strength
GASKET	EPDM
SCREWS DIAMETER	from 6,0 to 6,5 mm
FASTENING	TBS EVO, MTS A2 AISI304




MATERIAL

A2 | AISI304 stainless steel.

FIELDS OF USE


Watertight and UV-resistant fastening of metal sheets to wooden substructures using TBS EVO or MTS screws.

CODES AND DIMENSIONS

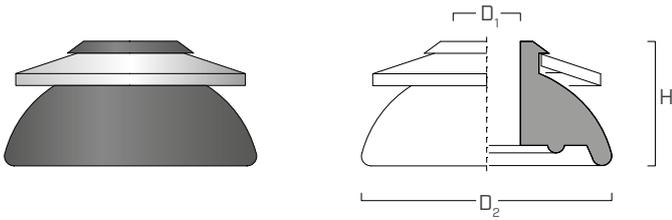


CODE	screw [mm]	D_2 [mm]	H [mm]	D_1 [mm]	pcs
WBAZ25A2	6,0 - 6,5	25	15	6,5	100


INSTALLATION

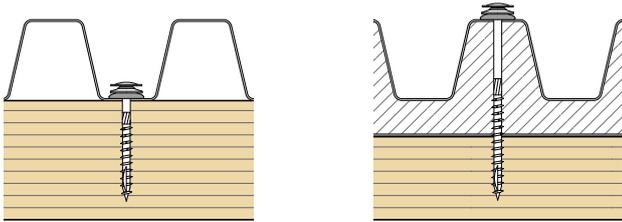


TBS EVO + WBAZ $\varnothing \times L$	fastening package [mm]
6 x 60	min. 0 - max. 40
6 x 80	min. 10 - max. 60
6 x 100	min. 30 - max. 80
6 x 120	min. 50 - max. 100
6 x 140	min. 70 - max. 120
6 x 160	min. 90 - max. 140
6 x 180	min. 110 - max. 160
6 x 200	min. 130 - max. 180

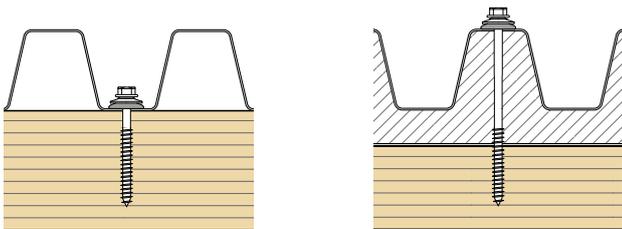


MTS A2 + WBAZ $\varnothing \times L$	fastening package [mm]
6 x 80	min. 10 - max. 60
6 x 100	min. 30 - max. 80
6 x 120	min. 50 - max. 100



Correct tightening



Excessive tightening




Insufficient tightening



Tightening off axis

NOTES: The thickness of the washer after installation is approximately 8-9 mm.

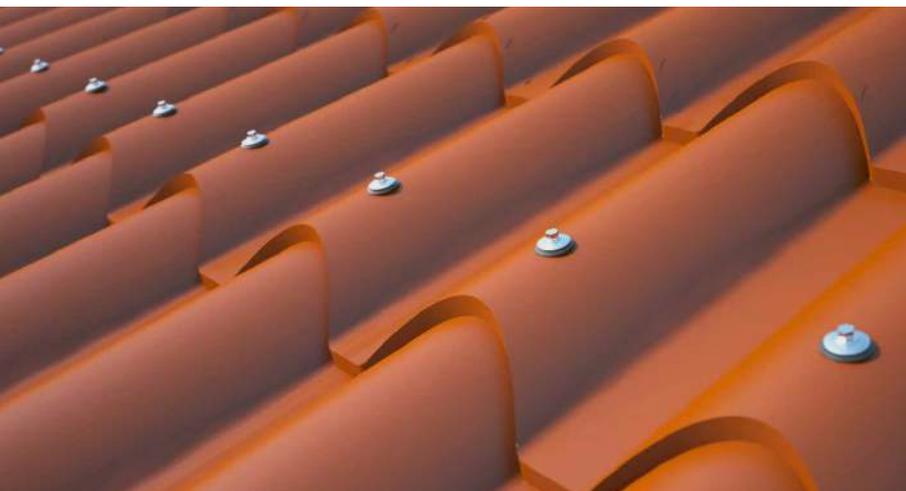

FAUX ROOFING TILE

Can also be used on sandwich panels, corrugated panels and faux roofing tiles.