

# R10 - R20 - R30

## ADJUSTABLE POST BASE

S235  
DAC COAT



CE  
ETA 10/0422

### ADJUSTABLE

Adjustable height, also after the product has been assembled. The regulation system is concealed by the sleeve, for optimal aesthetics.

### RAISED

Outdistanced from the ground to avoid water splash and stagnation and guarantee high durability. Concealed fastening on the timber element.

### ATTENTION TO DETAILS

The base is characterized by an auxiliary hole allowing to insert the screws HBS PLATE EVO.



## CHARACTERISTICS

FOCUS	adjustable height after assembly
COLUMNS	from 80 x 80 mm to 240 x 240 mm
HEIGHT	adjustable from 140 to 250 mm
FASTENERS	HBS PLATE EVO, SKR, VIN-FIX PRO

### VIDEO

Scan the QR Code and watch the video on our YouTube channel



## MATERIAL

Bright zinc plated carbon steel Dac Coat.

## FIELDS OF USE

Outdoor joints. Suitable for service class 1, 2 and 3

- solid timber and glulam
- CLT, LVL



## STATICS

High compressive strength from the bigger product-versions. The versions with the pass-through rod ensures high resistance to tensile and compressive loading.

## FUNCTIONALITY


Once the assembly is completed, the adjustable height allows to correct any possible unevenness occurred during the installation phase.

## CODES AND DIMENSIONS

### R10

CODE	H [mm]	top plate [mm]	top holes [n. x mm]	bottom plate [mm]	lower holes [n. x mm]	screws HBS PLATE EVO*	pcs
R1080	140-165	80 x 80 x 6	4 x Ø9	120 x 120 x 6	4 x Ø11,5	4 x HBSPEVO690	4
R10100	170-205	100 x 100 x 6	4 x Ø11	160 x 160 x 6	4 x Ø11,5	4 x HBSPEVO8100	4
R10140	200-250	140 x 140 x 8	4 x Ø11	200 x 200 x 8	4 x Ø11,5	4 x HBSPEVO8100	4


\*The HBS PLATE EVO screws are not included and can be ordered separately



### R20

CODE	H [mm]	top plate [mm]	top holes [n. x mm]	bottom plate [mm]	lower holes [n. x mm]	rod Ø x L [mm]	screws HBS PLATE EVO*	pcs
R2080	140-165	80 x 80 x 6	4 x Ø9	120 x 120 x 6	4 x Ø11,5	16 x 80	4 x HBSPEVO690	4
R20100	170-205	100 x 100 x 6	4 x Ø11	160 x 160 x 6	4 x Ø11,5	20 x 120	4 x HBSPEVO8100	4
R20140	200-250	140 x 140 x 8	4 x Ø11	200 x 200 x 8	4 x Ø11,5	24 x 150	4 x HBSPEVO8100	4


\*The HBS PLATE EVO screws are not included and can be ordered separately



### R30 - DISC FLAT

CODE	H [mm]	top plate [mm]	bottom plate [mm]	lower holes [n. x mm]	rod Ø [mm]	DISC FLAT*	LBS screws*	pcs
R3080	150-170	Ø80 x 15	120 x 120 x 6	4 x Ø11,5	16	1 x DISCF80	10 x LBS760	4
R30120	180-210	Ø120 x 15	160 x 160 x 6	4 x Ø11,5	20	1 x DISCF120	18 x LBS780	4

\*The LBS screws and DISC FLAT connector are not included in the package and can be ordered separately




#### MATERIAL AND DURABILITY

TYP R: S235 carbon steel with special coating Dac Coat.  
To be used in service classes 1, 2 and 3 (EN 1995-1-1).  
Upper plate R30: bright zinc plated carbon steel.

#### FIELD OF USE

- Timber columns
- Timber beams


#### EXTERNAL LOADS

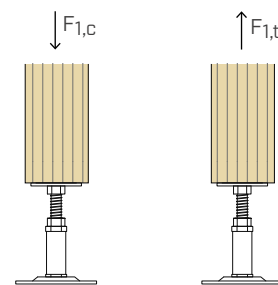

## ADDITIONAL PRODUCTS - FASTENING


type	description		d [mm]	support	page
XEPOX D	epoxy adhesive		-		146
AB1 - AB1 A4	metal anchor		10		494 - 496
SKR	screw anchor		10		488
VIN-FIX PRO	chemical anchor		M10		509
EPO-FIX PLUS	chemical anchor		M10		517
HYB-FIX	chemical anchor		M10		-

## GEOMETRY

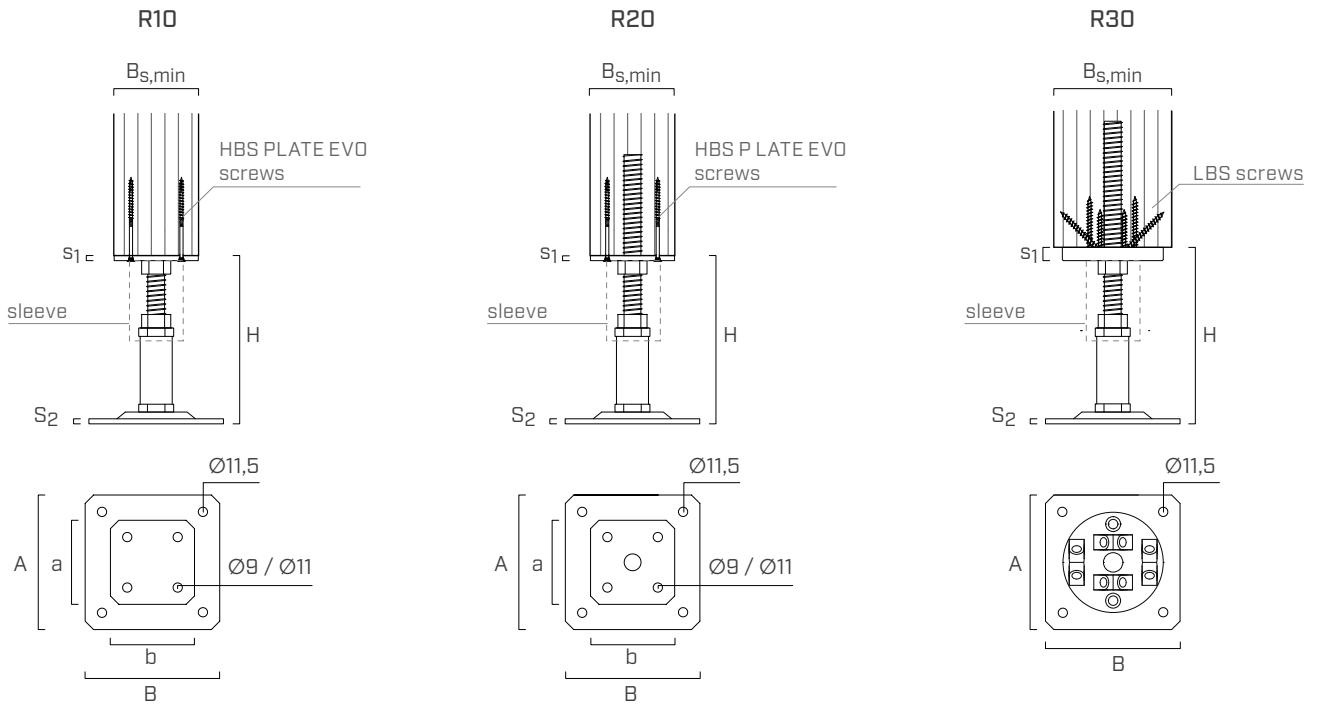





	CODE	B <sub>s,min</sub> [mm]	A x B x S <sub>2</sub> [mm]	H [mm]	a x b x s <sub>1</sub> [mm]
R10	R1080	80	120 x 120 x 6	140-165	80 x 80 x 6
	R10100	100	160 x 160 x 6	170-205	100 x 100 x 6
	R10140	140	200 x 200 x 8	200-250	140 x 140 x 8
R20	R2080	80	120 x 120 x 6	140-165	80 x 80 x 6
	R20100	100	160 x 160 x 6	170-205	100 x 100 x 6
	R20140	140	200 x 200 x 8	200-250	140 x 140 x 8
R30	R3080	120	120 x 120 x 6	150-170	Ø80 x 15
	R30120	160	160 x 160 x 6	180-210	Ø120 x 15

## ASSEMBLY



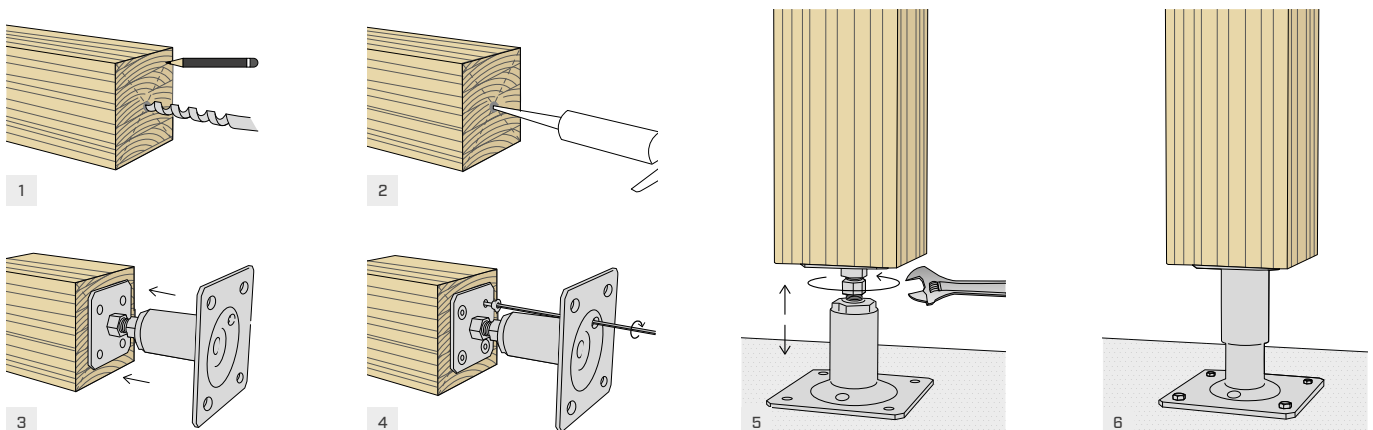



## STATIC VALUES

### COMPRESSION STRENGTH

stress	TYP R		fastening	column $B_{s,min}$ [mm]	$R_{1,c}$ k timber		$R_{1,c}$ k steel		
					[kN]	$\gamma_{timber}^{(1)}$	[kN]	$\gamma_{steel}$	
	R10	R1080		80	71,2	Y <sub>MT</sub>	48,3	Y <sub>M1</sub>	
		R10100		100	111,8		75,4		
		R10140		140	222,8		108,6		
	R20	R2080		80	55,8		48,3		
		R20100		100	90,4		75,4		
		R20140		140	189,0		108,6		
	R30	R3080		120	-		-		48,3
		R30120		160	-		-		75,4

### TENSILE STRENGTH

stress	TYP R		fastening	column $B_{s,min}$ [mm]	$R_{1,t}$ k timber		$R_{1,t}$ k steel			
					[kN]	$\gamma_{timber}^{(1)}$	[kN]	$\gamma_{steel}$		
	R10	R1080		100	4,2	Y <sub>MC</sub>	-	-		
		R10100		120	5,3		-	-		
		R10140		160	5,3		-	-		
	R20	R2080		100	16,1		Y <sub>MT</sub>	-	-	
		R20100		120	30,2			-	-	
		R20140		160	45,2			-	-	
	R30	R3080		120	18,7			Y <sub>MC</sub>	24,3	Y <sub>M0</sub>
		R30120		160	62,4				36,4	

#### NOTES:

<sup>(1)</sup>  $\gamma_{MT}$  partial coefficient of the timber;  $\gamma_{MC}$  partial coefficient for connections.

#### GENERAL PRINCIPLES:

- The characteristic values are in accordance with ETA-10/0422, except for the tensile values of R10 and R20 calculated as follows:
  - for R10 they are calculated considering the withdrawal resistance of HBS PLATE EVO screws parallel to the grain according to ETA-11/0030;
  - for R20 they are calculated considering only the withdrawal resistance of the threaded rod fixed with epoxy adhesive (XEPOXD400) and in accordance with DIN 1052: 2008.
- The design values are obtained from the characteristic values as follows:

$$R_d = \min \left\{ \begin{array}{l} \frac{R_{i,k \text{ timber}} \cdot k_{mod}}{\gamma_{timber}} \\ \frac{R_{i,k \text{ steel}}}{\gamma_{steel}} \end{array} \right.$$

The coefficients  $k_{mod}$  and  $\gamma$  should be taken according to the current regulations used for the calculation.

- For the calculation process a timber density  $\rho_k = 350 \text{ kg/m}^3$  has been considered.
- Dimensioning and verification of timber and concrete elements must be carried out separately.