


# TERRA BAND UV


## BUTYL ADHESIVE TAPE

- Suitable for both terraces and façades, it protects the timber battens from water and UV rays
- The reinforced aluminium backing ensures unlimited UV resistance
- Soft and easily workable tape. The mix closes over the perforations and remains perfectly watertight

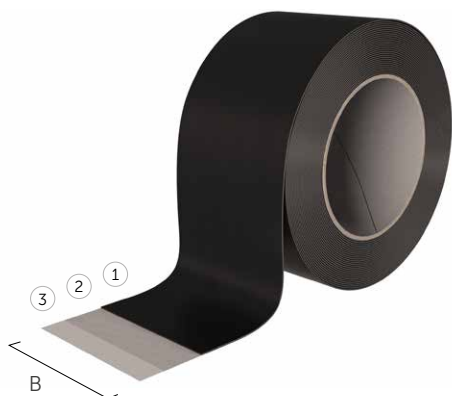


CODE	B [mm]	L [m]	pcs
DECKUV75	75	10	8
TERRAUV100	100	10	6
TERRAUV200	200	10	4
TERRAUV400	400	10	2

Thickness 0,8 mm

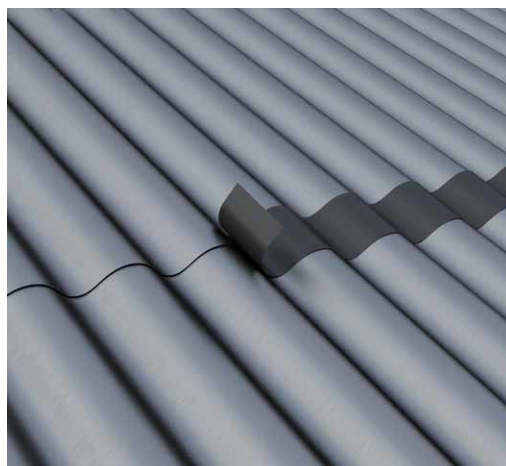

## COMPOSITION

- ① support: UV-stable anthracite-coloured reinforced aluminium film
- ② glue: grey adhesive butyl compound
- ③ release liner: PE film



## TECHNICAL DATA

properties	standard	value
initial tack	ASTM D 2979	8 N
adhesion on steel at 180°	ASTM D 1000	20 N/cm
vertical sliding	ISO 7390	0 mm
MD/CD tensile strength	EN 12311-1	185 / 200 N/50 mm
MD/CD elongation at break	EN 12311-1	10 / 20 %
water vapour resistance factor (μ)	UNI EN 1931	2720000
reaction to fire	EN 13501-1	class E
thermal resistance	-	-30 / +90 °C
application temperature	-	0 / +40 °C
watertightness	-	conforming
resistant to UV rays	-	permanent
storage temperature <sup>(1)</sup>	-	+5 / +40 °C
solvents	-	no
VOC emissions	ISO 16000	30 μg/m <sup>3</sup>
French VOC classification	ISO 16000	A+

<sup>(1)</sup>Store the product in a cool, dry place for no more than 12 months.  
Waste classification (2014/955/EU): 08 04 99.