

BYTUM BAND

SELF-ADHESIVE BITUMINOUS BAND,
CAN BE PLASTERED



CAN BE PLASTERED

Polypropylene means the fabric can be plastered, offering greater versatility.

COST - PERFORMANCE

The bituminous mixture guarantees good adhesiveness, even on concrete.



COMPOSITION

release liner
silicone coated paper

glue
black adhesive bituminous compound

support
non-woven PP fabric

TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-1	140 / 105 N	31.47 / 23.6 lbf
Elongation at break point MD/CD	EN 12311-1	100 / 100 %	-
Adhesion on concrete	ASTM D 1000	2,9 N/mm	16.56 lbf/in
Adhesion of class C2E cementitious glue on TNT	EN 12004 / EN 1348	0,9 N/mm ²	130.53 lbf/in ²
Reaction to fire	DIN 4102	class B2	-
Temperature resistance	-	-20 / +80 °C	-4 / +176 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / +104 °F
VOC emissions	ISO 16000	8 µg/m ³	-

⁽¹⁾Store the product in a cool, dry place for no more than 12 months.


It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun.

Waste classification (2014/955/EU): 17 03 02.

CODES AND DIMENSIONS

CODE	B	s	L	B	s	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
BYTBAND240	240	1	15	9.5	39	49	2
BYTBAND370	370	1	15	14.6	39	49	1

■ FIELDS OF APPLICATION

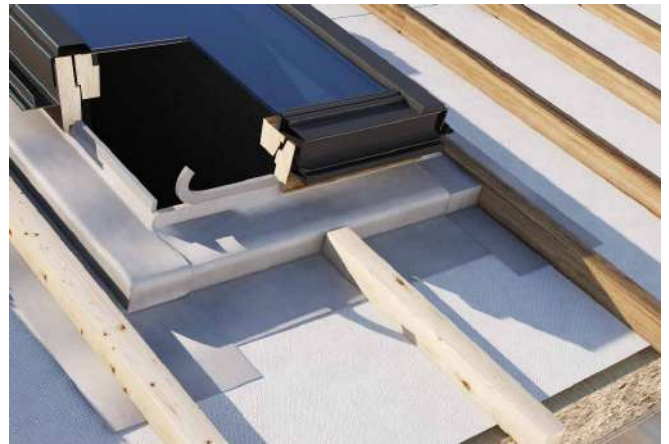

■ RELATED PRODUCTS



BYTUM LIQUID
page 48



BYTUM SPRAY
page 46



HAMMER STAPLER 22
page 330



VERY LOW EMISSIONS

Thanks to the special formulation of the bituminous compound, it guarantees health safety with regard to emissions.

SAFETY

It protects walls and foundation walls against rising damp over time. Also suitable as a general sealing wall barrier or window/door node waterproofing product.