

C4 EVO COATING



SNK EVO BUCKET



SCREW WITH C4 EVO COATING AND
COUNTERSUNK HEAD IN BUCKET

d_1 [mm]	d_k [mm]	CODE	L [mm]	b [mm]	A [mm]	pcs
5 TX 25	10,00	SNKEVOBUC550	50	24	26	1400
		SNKEVOBUC560	60	30	30	1300
		SNKEVOBUC570	70	35	35	600
		SNKEVOBUC580	80	40	40	600
		SNKEVOBUC590	90	45	45	600
		SNKEVOBUC5100	100	50	50	700
		SNKEVOBUC5120	120	60	60	600
6 TX 30	12,00	SNKEVOBUC660	60	30	30	900
		SNKEVOBUC670	70	40	30	800
		SNKEVOBUC680	80	40	40	700
		SNKEVOBUC690	90	50	40	600
		SNKEVOBUC6120	120	60	60	400
		SNKEVOBUC6140	140	75	65	400
		SNKEVOBUC6160	160	75	85	350




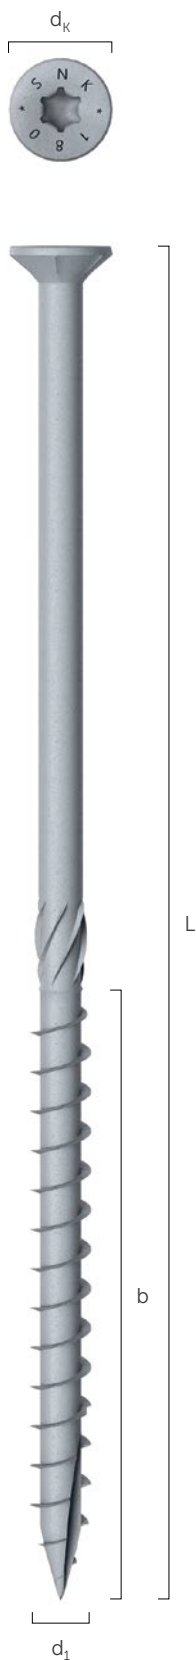
SNK EVO

SCREW WITH C4 EVO COATING AND COUNTERSUNK HEAD

- The mechanical performance of SNKs and the corrosion resistance of the EVO coating based on epoxy and aluminium flakes
- No rust after 1440 hours of salt spray exposure (ISO 9227), best-in-class performance
- For outdoor use in service class 3 and atmospheric corrosivity class C4 (coastal and industrial areas)





 Data sheet available online



d ₁ [mm]	d _k [mm]	CODE	L [mm]	b [mm]	A [mm]	pcs
5 TX 25	10,00	SNKEVO550	50	24	26	200
		SNKEVO560	60	30	30	200
		SNKEVO570	70	35	35	100
		SNKEVO580	80	40	40	100
		SNKEVO590	90	45	45	100
		SNKEVO5100	100	50	50	100
		SNKEVO5120	120	60	60	100
6 TX 30	12,00	SNKEVO650	50	35	15	100
		SNKEVO660	60	30	30	100
		SNKEVO670	70	40	30	100
		SNKEVO680	80	40	40	100
		SNKEVO690	90	50	40	100
		SNKEVO6100	100	50	50	100
		SNKEVO6120	120	60	60	100
		SNKEVO6140	140	75	65	100
		SNKEVO6160	160	75	85	100
8 TX 40	14,50	SNKEVO8120	120	60	60	100
		SNKEVO8140	140	60	80	100
		SNKEVO8160	160	80	80	100
		SNKEVO8180	180	80	100	100
		SNKEVO8200	200	80	120	100
		SNKEVO8240	240	80	160	100
		SNKEVO8300	300	100	200	100

A maximum fastening thickness



SHT EVO


TURNED WASHER WITH C4 EVO COATING


d ₁ SNK EVO [mm]	CODE	D ₂ [mm]	h [mm]	pcs
6	SHTEVO6	20	4,5	100
8	SHTEVO8	25	5,5	50
10	SHTEVO10	30	6,5	50

TLL EVO

SCREW WITH C4 EVO COATING AND WASHER HEAD

- The mechanical performance of TLL and the corrosion resistance of EVO coating based on epoxy and aluminium flakes
- No rust after 1440 hours of salt spray exposure (ISO 9227)
- It can be used for service class 3 outdoor applications and under class C4 atmospheric corrosion conditions (industrial and coastal areas)

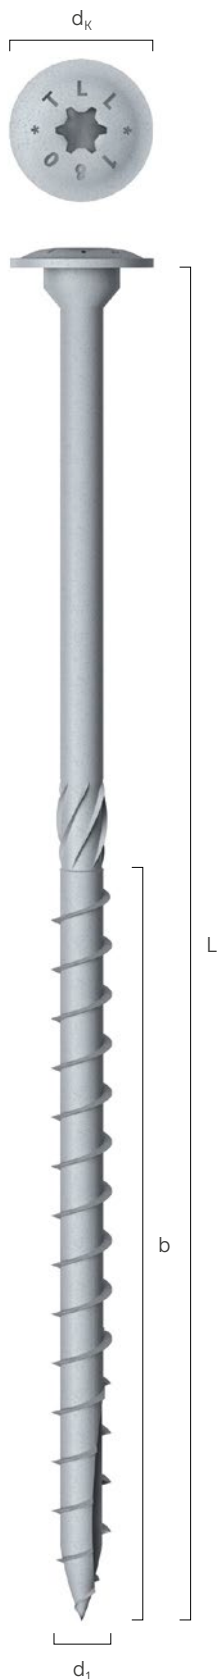


 Data sheet available online



	d ₁ [mm]	d _k [mm]	CODE	L [mm]	b [mm]	A [mm]	pcs
RELATED PRODUCTS	6 TX 30	15,50	TLLEVO680	80	50	30	100
			TLLEVO6100	100	60	40	100
			TLLEVO6120	120	75	45	100
			TLLEVO6140	140	75	65	100
			TLLEVO6160	160	75	85	100
			TLLEVO6180	180	75	105	100
			TLLEVO6200	200	75	125	100
8 TX 40	19,00	TLLEVO8100	100	52	48	50	
		TLLEVO8120	120	80	40	50	
		TLLEVO8140	140	80	60	50	
		TLLEVO8160	160	100	60	50	
		TLLEVO8180	180	100	80	50	
		TLLEVO8200	200	100	100	50	

A maximum fastening thickness




WBAZ
WASHER WITH GASKET FOR METAL SHEET



CPL
PRE-PAINTED METAL SHEET CAP WITH PE GASKET




LEWIS AND SNAIL BITS
TWIST DRILL BITS FOR DRILLING

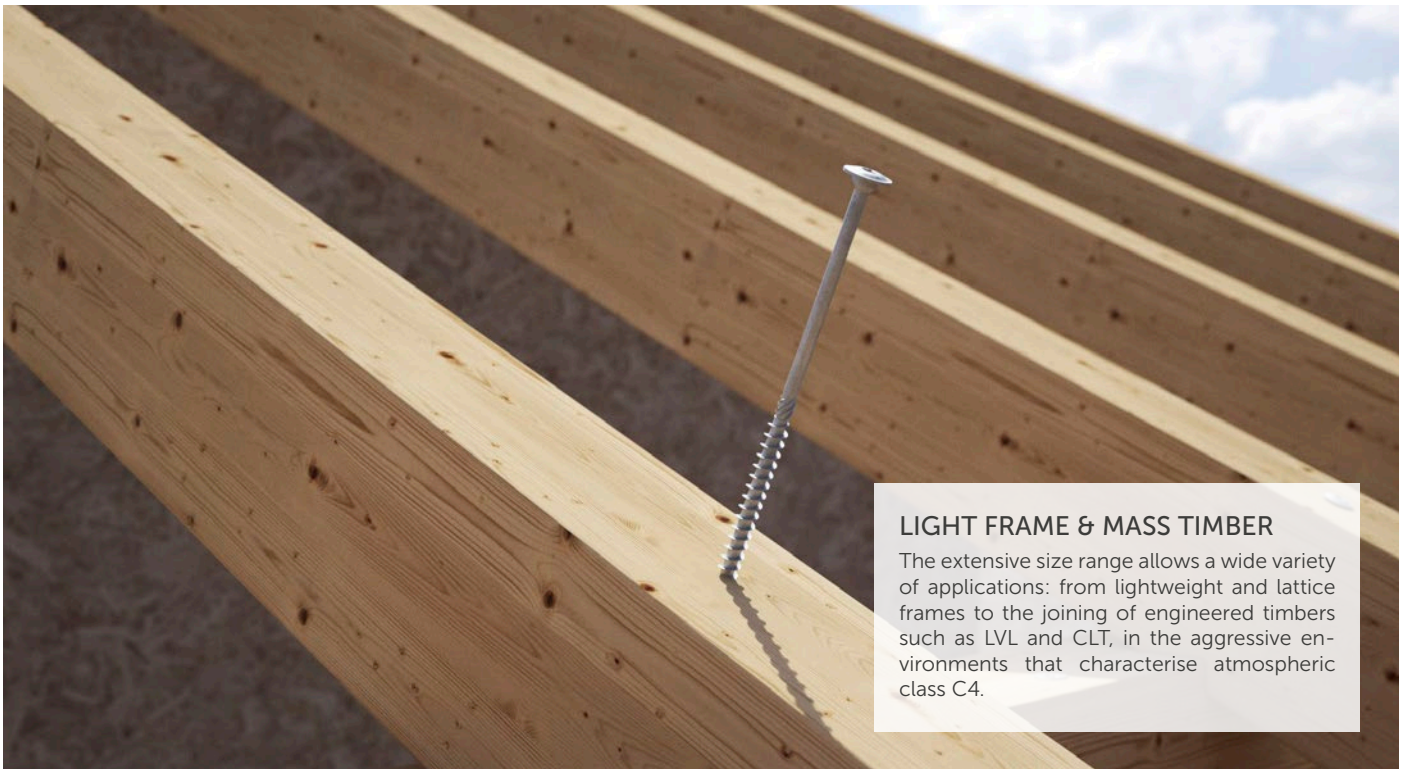

LIGHT FRAME & MASS TIMBER

The extensive size range allows a wide variety of applications: from lightweight and lattice frames to the joining of engineered timbers such as LVL and CLT, in the aggressive environments that characterise atmospheric class C4.

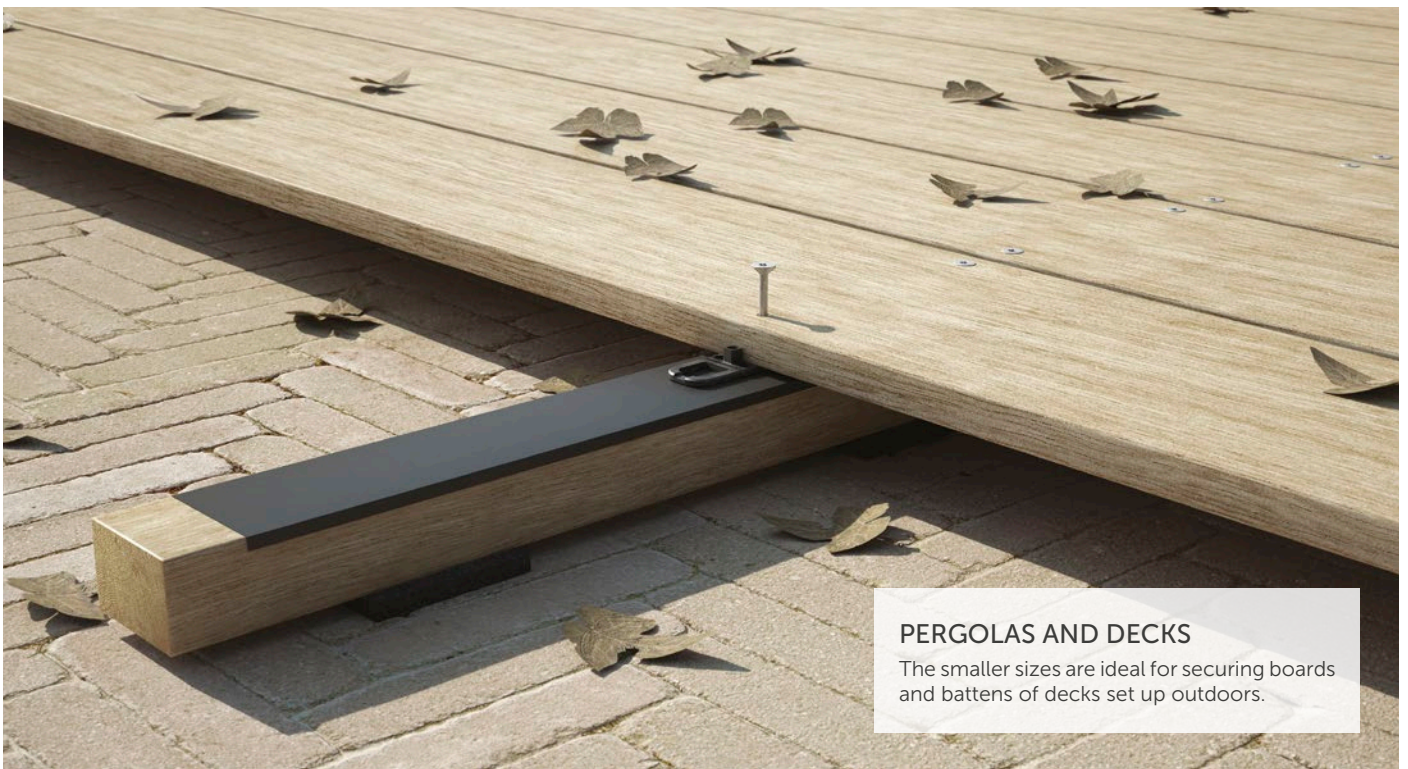

PERGOLAS AND DECKS

The smaller sizes are ideal for securing boards and battens of decks set up outdoors.



info@holztechnic.com
www.holztechnic.com



Make it easy.

01FLC4EVOHTEN 08|23

